

# 1 Utilization

Waterproofing MEMBRANE and SEALING Tape Imported by GRUPPO STAMPLAST, it is the ideal solution for waterproofing shower trays, floors and walls. The three layers guarantee an excellent grip with cement. The tape allows to join two sheets of waterproofing membrane preventing infiltrations.




# 2 Models

COD.	MOD.*			
GUAINA-ROTOLO10	Guaina impermeabilizzante 275g/m <sup>2</sup>		80x120x120	8,250 kg/rt
GUAINA-NASTRO10	Sealing tape		--	--

\*MEASURES IN CENTIMETERS

# 3 Technical features

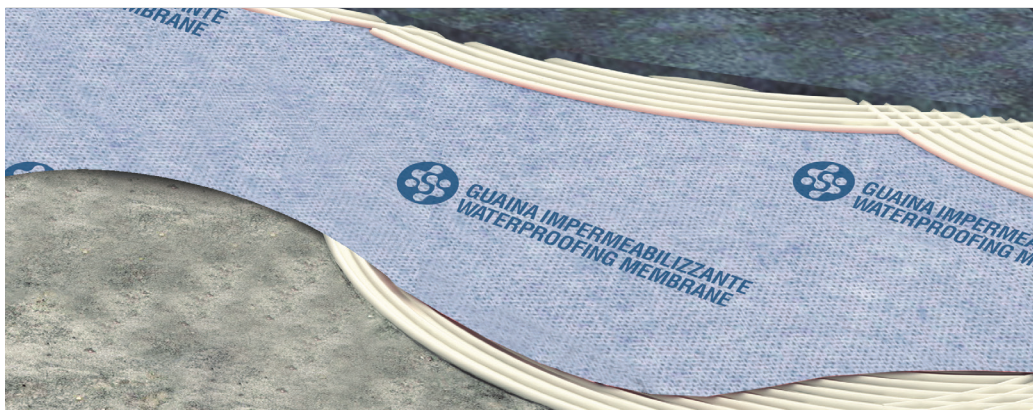

## Materials

- Waterproofing membrane composed of:
- Substrate top: Polypropilene non-woven
  - Membrane: One inner layer of Modified Low Density Polyethylen
  - Substrate bottom: Polypropylene non-woven


Sealing tape composed of a Polypropylene layer + an elastic adhesive butyl rubber resistant to aging layer

## Colori



Physical Properties:	DIN	Value	Tolerance
Max. total width	Internal	1000 mm (Additional widths upon request)	+/- 5 mm
Thickness:	Internal	0,62 mm	+/- 0,1 mm
Total weight	Internal	275 g/m <sup>2</sup>	+/- 20 g/m <sup>2</sup>
Length per roll	Internal	30 metres (Alternative make ups upon request)	- 0,0 m/+ 1 %
Breaking load longitudinal	DIN EN ISO 527-3	370 N / 50 mm	≥ 300 N / 50 mm
Breaking load lateral	DIN EN ISO 527-3	250 N / 50 mm	≥ 200 N / 50 mm
Resistance to tearing longitudinal	DIN EN 12310-2	100 N	≥ 70 N
Resistance to tearing lateral	DIN EN 12310-2	140 N	≥ 100 N
Resistance to water pressure	DIN EN 1928 (Version B)	≥ 1,5 bar	
UV-Resistance	DIN EN ISO 4892-3	≥ 450 h	
Moisture vapour resistance air equivalent (sd)	DIN EN 1931	≥ 85 m	
Bonding strength	DIN EN 1348	≥ 0,5 N/mm <sup>2</sup> *	≥ 0,2 N/mm <sup>2</sup>
Fire classification	DIN EN 4102	B2	

\* in dependence of the used adhesive



Butyl rubber layer

## waterproofing membrane and sealing tape