

KRONmat

ACCESS ROOF LIGHT


OptiLook

The OPTILOOK T and OPTILOOK access roof lights due to the top hung design and sash opened outwards enable both room ventilation and safe and easy access to the roof.


In OPTILOOK T version the sash comes with integrated toughened glass while in OPTILOOK version with single toughened glass, thus enhancing durability and resistance to hailstones as well as better room illumination.

The OPTILOOK T and OPTILOOK access roof lights are intended solely for uninhabited spaces.

Available in two most popular colours RAL 7022 (grey) and RAL 8004 (red).

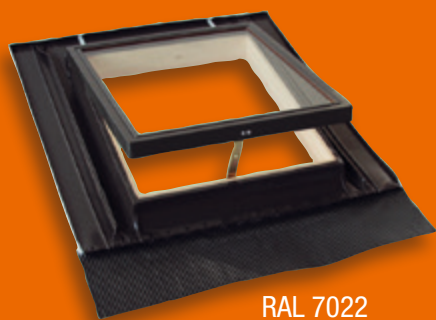

RAL 7022

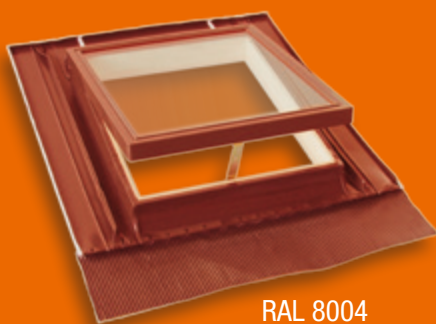

RAL 8004

46x55



46x75




64x64




Characteristics:

- top hung structure – sash opens outwards
- window frame made of impregnated pinewood
- aluminium sash frame, powder coated and fitted with a gasket long the whole perimeter.
- three-step opening providing a facility for fresh air inflow adjustment
- universal aluminium flashing finished with a flexible apron enables installation in the majority of roofing materials
- as standard equipped with an installation kit facilitating and accelerating installation
- suitable for roofs with pitches between 15 and 60 degrees
- easy fitting system on battens does not require additional trimmers and allows the movement of the window horizontally to better adjust the place of installation in relation to the roof material profile
- satisfies the requirements of the European product standard EN 14351-1, CE certified

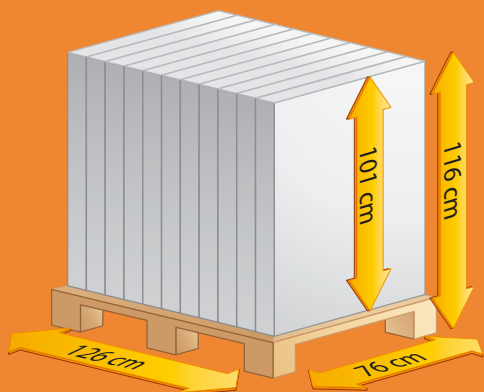

Optilook access roof light 46 x 75
Quantity per pallet – 11 pcs.

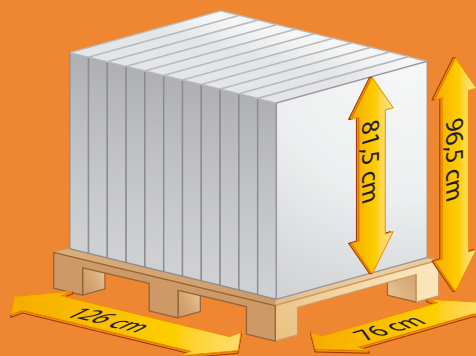

Optilook access roof light 46 x 55
Quantity per pallet – 11 pcs.

KRONMAT Sp. z o.o.
ul. Węgierska 146 C, 33-300 Nowy Sącz
tel./fax +48 18 414 0 150
e-mail: biuro@kronmat.com
www.kronmat.com

KRONmat

ACCESS ROOF LIGHT

OptiLook



The WGI and WGT OPTILOOK access roof lights due to the top hung design and sash opened outwards enable both room ventilation and safe and easy access to the roof.
In WGI version the sash comes with integrated toughened glass while in WGT version with single toughened glass, thus enhancing durability and resistance to hailstones as well as better room illumination.
The WGI and WGT OPTILOOK access roof lights are intended solely for uninhabited spaces.
Available in two most popular colours RAL 7022 (grey) and RAL 8004 (red).

KRONmat

- top hung structure – sash opens outwards
- window frame made of impregnated pinewood
- aluminium sash frame, powder coated and fitted with a gasket long the whole perimeter.
- three-step opening providing a facility for fresh air inflow adjustment
- universal aluminium flashing finished with a flexible apron enables installation in the majority of roofing materials
- as standard equipped with an installation kit facilitating and accelerating installation
- suitable for roofs with pitches between 15 and 60 degrees
- easy fitting system on battens does not require additional trimmers and allows the movement of the window horizontally to better adjust the place of installation in relation to the roof material profile
- satisfies the requirements of the European product standard EN 14351-1, CE certified